

430W

*

- Punti a muro con borchia a filo vetro in acciaio inox.
- Puntos a pared con tachón hilo vidrio en acero.
- Stainless-steel wall points with stud of the end part of the glass.
- Wandpunkte Befestigung im Glaslot aus Edelstahl.
- Point muraux en inox avec vis fraisée.


431W

*

- Punti a muro con borchia esterna in acciaio inox.
- Puntos a pared con tachón exterior en acero.
- Stainless-steel wall points with external stud.
- Wandpunkte Ausserbefestigung aus Edelstahl.
- Point muraux fixe cylindrique en inox.

*

Spessori vetro e lunghezze vedere tabella sotto
Glass thickness and length see the table below

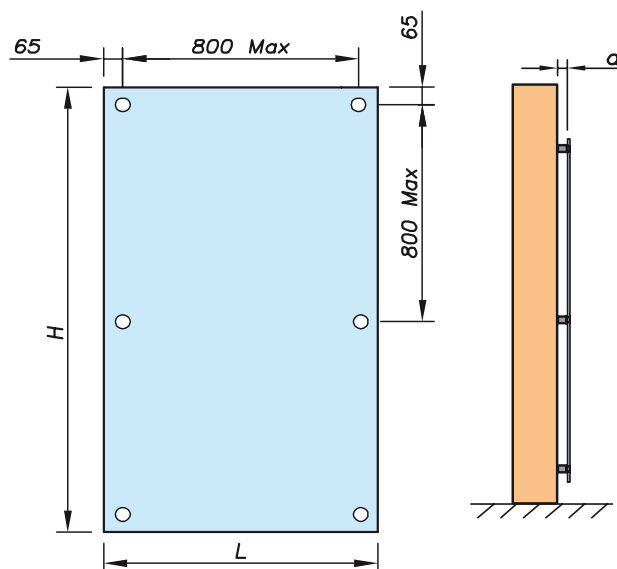

SCHEMA ESPLOSO - LAYOUT DRAWING	A	SP SPESSORE VETRO GLASS THICKNESS	FORATURA - DRILLING	CODICE - CODE
BORCHIA FILO VETRO TACHÓN HILO VIDRIO STUD OF THE END PART OF THE GLASS BEFESTIGUNG IM GLASLOT AVEC VIS FRAISÉE	20	8 + 12 12.76 + 17.52 19 + 22		430W20 430W21 430W22
	30	8 + 12 12.76 + 17.52 19 + 22		430W30 430W31 430W32
	40	8 + 12 12.76 + 17.52 19 + 22		430W40 430W41 430W42
	50	8 + 12 12.76 + 17.52 19 + 22		430W50 430W51 430W52
	70	8 + 12 12.76 + 17.52 19 + 22		430W70 430W71 430W72
	100	8 + 12 12.76 + 17.52 19 + 22		430W10 430W11 430W12
BORCHIA ESTERNA TACHÓN EXTERIOR EXTERNAL STUD AUSSERBESTIGUNG AVEC VIS CYLINDRIQUE	20	8 + 12 12.76 + 17.52 19 + 22		431W20 431W21 431W22
	30	8 + 12 12.76 + 17.52 19 + 22		431W30 431W31 431W32
	40	8 + 12 12.76 + 17.52 19 + 22		431W40 431W41 431W42
	50	8 + 12 12.76 + 17.52 19 + 22		431W50 431W51 431W52
	70	8 + 12 12.76 + 17.52 19 + 22		431W70 431W71 431W72
	100	8 + 12 12.76 + 17.52 19 + 22		431W10 431W11 431W12