


D05E72N

oildynamic
pivot system

D05E72SOL

free version
without stop



SLASH

oildynamic pivot system

• Kit Slash per box doccia con 1 spalla in vetro. Con vetro fisso frontale. Stop a +90°.

• Kit Slash para box ducha: 1 lado en vidrio. Frente de cristal fijo. Stop a +90°.


• Set Slash for shower tray wall-glass. One door and one fixed glass. Stop at +90°.

• Set Slash für Wand-Glas Dusche. Eine Tür und ein Seitenteil. +90° Feststellung.

• Kit Slash pour cabine de douche avec une porte, un panneau fixe en verre et un fixe latéral. Arrêt +90°.

*

È necessaria una battuta in chiusura in quanto la cerniera ha una precarica - Necesita de un cierre con tope, puesto que la bisagra tiene una precarga - The hinge is preloaded which makes an end stop necessary - Ein Anschlag ist notwendig, da der Beschlag eine Vorspannung besitzt - La charnière a une charge, il est donc nécessaire d'avoir un arrêt de fermeture.

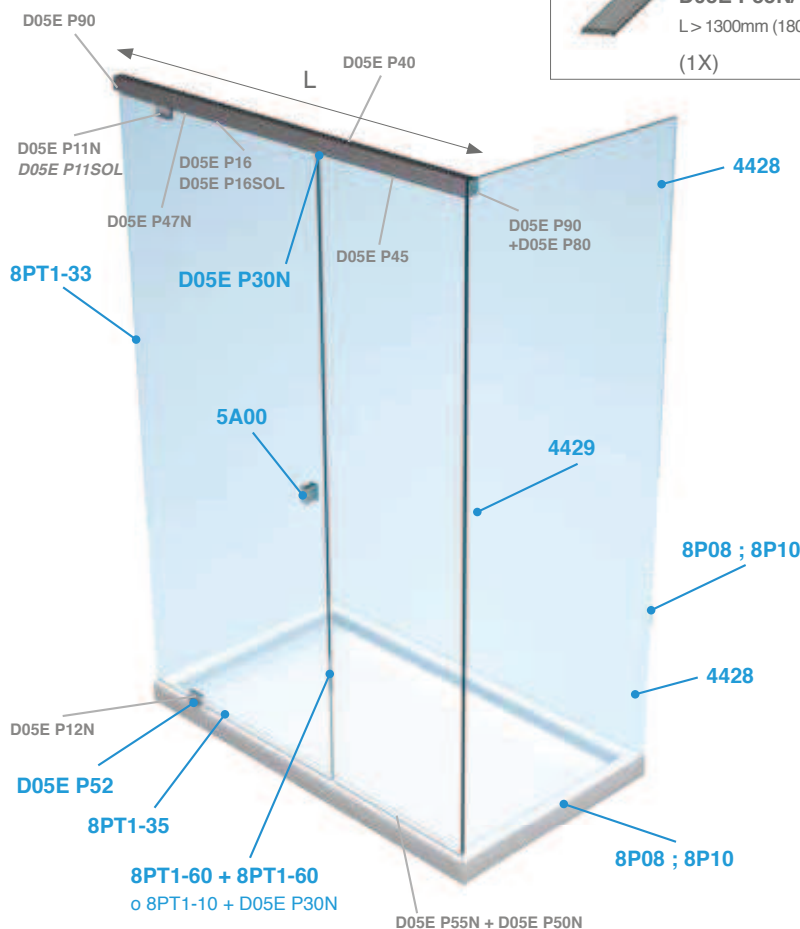


Da specificare all'ordine - Especificar en el pedido - Specify at time of order
Bitte mit der Bestellung genau angeben - Préciser lors de la commande



D05E72N/08

D05E72SOL/08



D05E72N/10

D05E72SOL/10

Compresso / Included

OILDYNAMIC
VERSION



D05E P16 (1X)



D05E P11N/08 (1X)

(vetro/glass 8mm)

D05E P11N/10 (1X)

(vetro/glass 10mm)

FREE
VERSION



D05E P16SOL
(1X)



D05E P11SOL/08 (1X)

(vetro/glass 8mm)

D05E P11SOL/10 (1X)

(vetro/glass 10mm)



D05E P12N/08 (1X)

(vetro/glass 8mm)




D05E P12N/10 (1X)

(vetro/glass 10mm)



D05E P47N
(1X)




D05E P80
(1X)



D05E P90
(2X)

Non compreso / Not included



D05E P40/13 (1,25 mt)

L ≤ 1300mm (630mm MIN)

D05E P40/18 (1,75 mt)

L > 1300mm (1800mm MAX)

(1X)



D05E P55N/13 (1,3 mt)

L ≤ 1300mm (630mm MIN)

D05E P55N/18 (1,8 mt)

L > 1300mm (1800mm MAX)

(1X)



D05E P45/09

(0,9 mt)

(1X) L ≤ 900mm

(2X) L > 900mm



D05E P50N

(1X)

OPTIONAL

Coperture inox per - Cubiertas de acero inoxidable para - Stainless steel covers for - Abdeckungen aus Edelstahl für - Cache inox pour



D05E P40

C D05E P40/13
C D05E P40/18
(1X)



D05E P90

C D05E P90
(1X)



8PT1-33
(1X)

Fermo - Tope - Stop - Endanschlag



D05E P30N
(1X)








D05E P52
(1X)

D05E72N

D05E72SOL

SLASH system

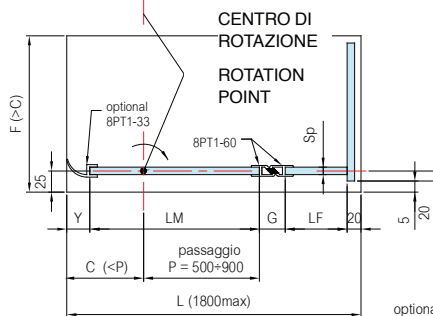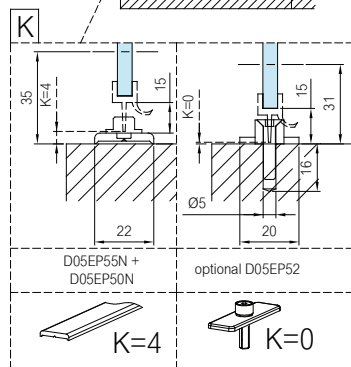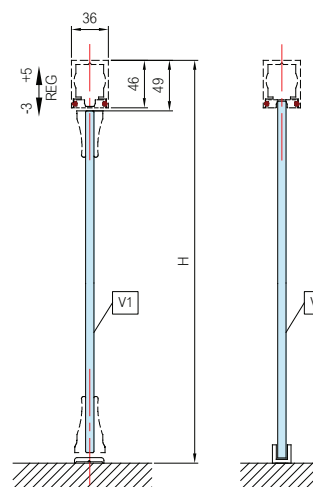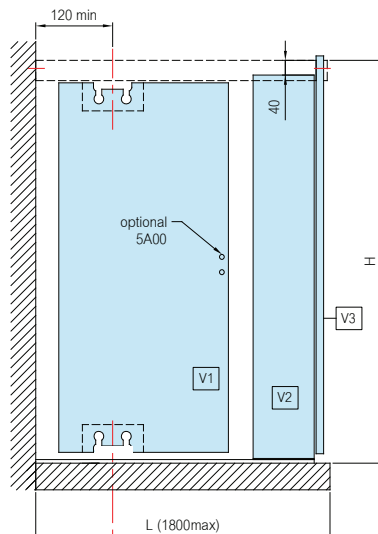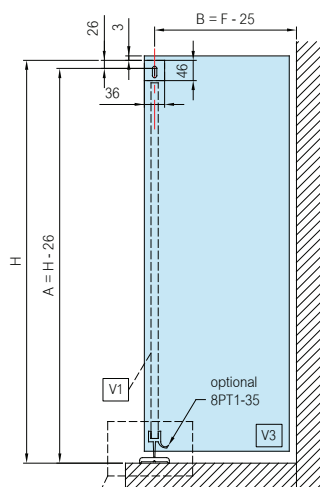

* Definire il passaggio P voluto. Valutare il centro di rotazione e definire la larghezza LM totale.
 Definir el pasaje P deseado. El centro de la vuelta de evaluar y definir el ancho total LM.
 Define the desired passage P. Consider the rotation point and define the total width LM.
 Den gewünschte Durchgang P definieren. Auf den Drehpunkt achten und die Gesamtbreite LM definieren.
 Définir le passage P souhaité. Evaluer le centre de rotation et définir la largeur LM totale.

Sp	Y	G
8mm	18mm	22mm
10mm	18mm	26mm

Sp	Y	G
8mm	18mm	6mm
10mm	18mm	8mm

Sp	Y	G
8mm	3mm	3mm
10mm	3mm	3mm

